




EX-CELL

KAISER

Decorative Receptacles for Waste and Recycling

ECHELON IN-GROUND MOUNTING

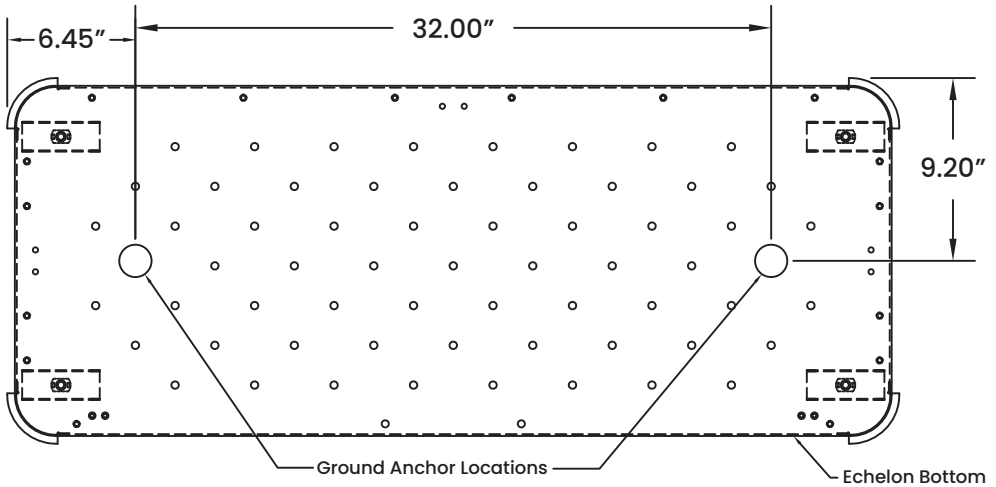

99-ES-017 (2x)
Ground Anchor Support



45-400A (2x)
5/16-18 - Anchor



30-ES-001 (2x)
5/16-18 x 4" Hex Head Bolt



Components to anchor the Echelon to the ground (concrete) have been supplied. Anchoring the unit is the customers' option and responsibility.

Level the unit before bolting the anchors to the Echelon.

***Care must be taken to not over tighten the anchor bolts as this may lead to distortion of the bottom as well as the unit itself.

In-Ground Mounting Instructions:

- 1) Mark hole locations using above spacing diagram.
- 2) To install anchor, drill (not included) 5/8" hole into the mounting surface at least as deep as the anchor.
- 3) Insert the anchor (threaded side down) into the hole, then tap the anchor until it is flush with the surface.
- 4) Tighten the hex bolt through the Ground Anchor Support. (See Diagram)

